

STP250S - 20/Wd+
STP245S - 20/Wd+

SUNTECH

Solar powering a green future™

250 Watt

CRYSTALLINE SILICON SOLAR MODULE

Features



High module conversion efficiency

Up to 15.2%, through superior cell technology and leading manufacturing capability



Positive tolerance

Guaranteed positive tolerance 0/+5% ensures power output reliability



Extended wind and snow load tests

Entire module certified to withstand extreme wind (3800 Pascal) and snow loads (5400 Pascal) *



Self clean effect

Anti-reflective, hydrophobic layer improves light absorption and reduces surface dust




Excellent weak light performance

Excellent performance under low light environments (mornings, evenings, and cloudy days)



Suntech current sorting process

All Suntech modules sorted and packaged by amperage, maximizing system output by reducing mismatch losses by up to 2%

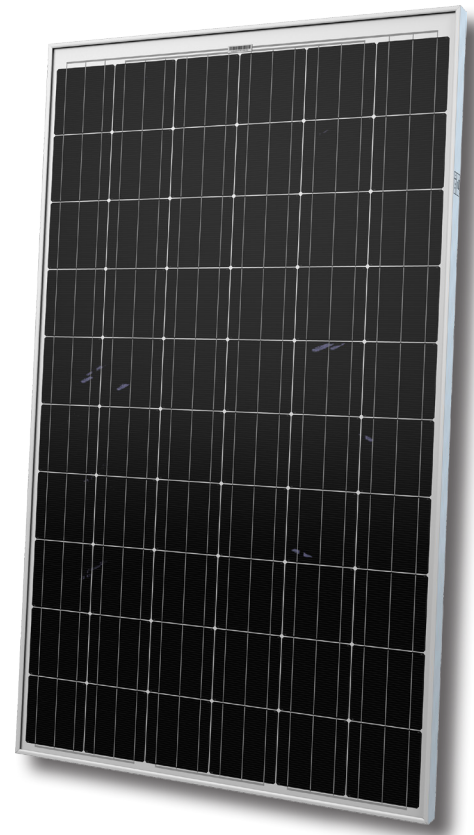


Certifications and standards:
 IEC 61215, IEC 61730, conformity to CE



Trust Suntech to Deliver Reliable Performance Over Time

- World's No.1 manufacturer of crystalline silicon photovoltaic modules
- Unrivaled manufacturing capacity and world-class technology
- Rigorous quality control meeting the highest international standards : ISO 9001: 2008, ISO 14001: 2004 and ISO 17025:2005
- Tested for harsh environment (salt mist: IEC 61701)

Industry-leading Warranty based on Pnom

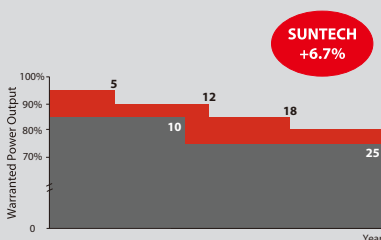

- Based on nominal power (Pnom)
- 25-year transferrable power output warranty: 5 years/95%, 12 years/90%, 18 years/85%, 25 years/80% **
- Warrants 6.7% more power than the market standard over 25 years
- 10-year material and workmanship warranty



Latest Eco-friendly Wafer Technology


With lower energy input during production, the Wd+ products are even more environmental friendly and reduce the energy payback time significantly compared to conventional monocrystalline modules.



Most Modern IP67 Rated Junction Box

Supports any orientation installation. High performance low resistance connectors ensure maximum module power output for highest energy production.

* Please refer to Suntech Standard Module Installation Manual for details.
 ** Please refer to Suntech Product Warranty for details.

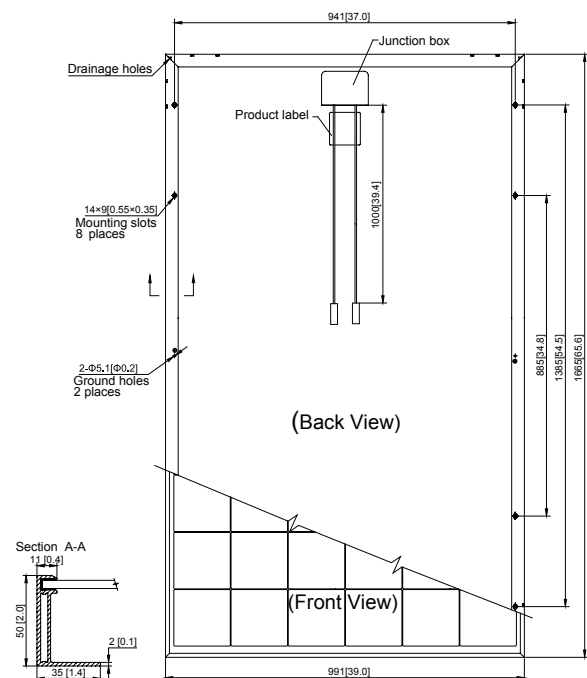

Note: mm [inch]

Electrical Characteristics

STC	STP250S-20/Wd+	STP245S-20/Wd+
Optimum Operating Voltage (Vmp)	30.7 V	30.5 V
Optimum Operating Current (Imp)	8.15 A	8.04 A
Open Circuit Voltage (Voc)	37.4 V	37.3 V
Short Circuit Current (Isc)	8.63 A	8.52 A
Maximum Power at STC (Pmax)	250 W	245 W
Module Efficiency	15.2%	14.8%
Operating Module Temperature	-40 °C to +85 °C	
Maximum System Voltage	1000 V DC (IEC) / 600 V DC (UL)	
Maximum Series Fuse Rating	20 A	
Power Tolerance	0/+5%	

STC: Irradiance 1000 W/m², module temperature 25 °C, AM=1.5
Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%

NOCT	STP250S-20/Wd+	STP245S-20/Wd+
Maximum Power at NOCT (Pmax)	183 W	180 W
Optimum Operating Voltage (Vmp)	28.0 V	27.9 V
Optimum Operating Current (Imp)	6.52 A	6.45 A
Open Circuit Voltage (Voc)	34.4 V	34.3 V
Short Circuit Current (Isc)	6.96 A	6.89 A

NOCT: Irradiance 800 W/m², ambient temperature 20 °C, AM=1.5, wind speed 1 m/s
Best in Class AAA solar simulator (IEC 60904-9) used, power measurement uncertainty is within +/- 3%


Mechanical Characteristics

Solar Cell	Crystalline silicon 156 × 156 mm (6 inches)
No. of Cells	60 (6 × 10)
Dimensions	1665 × 991 × 50 mm (65.6 × 39.0 × 2.0 inches)
Weight	19.8 kgs (43.7 lbs.)
Front Glass	3.2 mm (0.13 inches) tempered glass
Frame	Anodized aluminium alloy
Junction Box	IP67 rated
	TUV (2Pfg1169:2007), UL 4703, UL 44
Output Cables	4.0 mm ² (0.006 inches ²), symmetrical lengths (-) 1000 mm (39.4 inches) and (+) 1000 mm (39.4 inches)
Connectors	RADOX® SOLAR integrated twist locking connectors

Packing Configuration

Container	20' GP	40' HC
Pieces per pallet	21	21
Pallets per container	6	28
Pieces per container	126	588

Current-Voltage & Power-Voltage Curve (245S-20)

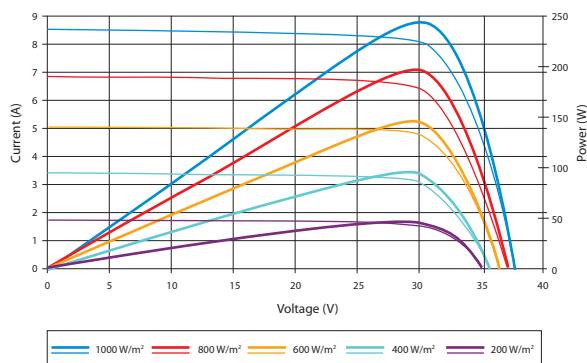

Excellent performance under weak light conditions: at an irradiance intensity of 200 W/m² (AM 1.5, 25 °C), 95.5% or higher of the STC efficiency (1000 W/m²) is achieved

Temperature Characteristics

Nominal Operating Cell Temperature (NOCT)	45±2°C
Temperature Coefficient of Pmax	-0.45 %/°C
Temperature Coefficient of Voc	-0.34 %/°C
Temperature Coefficient of Isc	0.050 %/°C

Dealer information



Inergy UK Ltd, Unit G, Kington Park, Malmesbury Rd, Chippenham, Wiltshire, SN15 5PZ, UK
Tel: Office: +44 (0)1249 654142 or UK Mobile: 07951 248255
Web: www.inergyuk.com Email: sales@inergyuk.com